
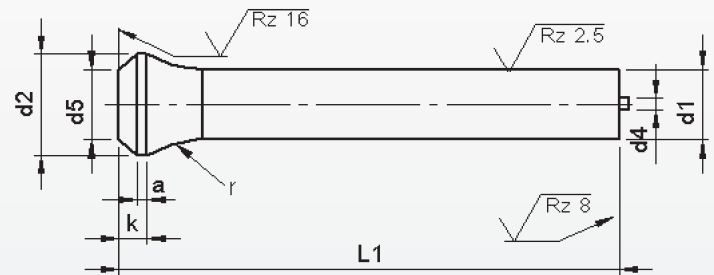


Posaunenhals Typ EP

Mit federndem auswerferstift

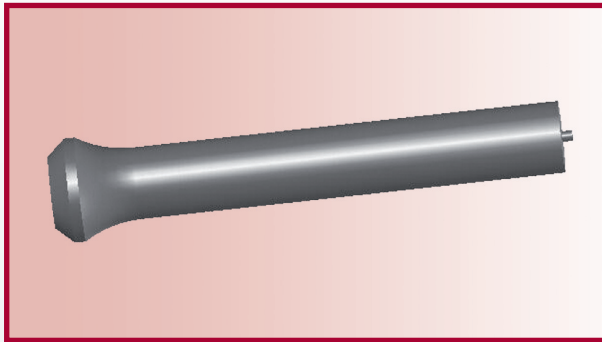

Werkstoff: HSS (1.3343)

Härte: Schaft: 64 ±2 HRC
Kopf: 50 ±5 HRC

d ₁	d ₂	k	a	d ₅	r	d ₄	l ₁				
							71	80	90	100	120
h6	0 -0.2	+0.2 0					Preis pro stück in EURO				
6	9.0	4.0	1.5	d _t ± 0.1	12.0	1	18,25	19,10	20,30	21,35	23,60
6.5	10.0					1	17,60	18,50	19,75	20,85	23,20
7	10.0					1	17,95	18,90	20,20	21,35	23,80
7.5	11.0					1	18,30	19,30	20,65	21,85	24,40
8	11.0					1	18,75	19,75	21,20	22,40	25,10
8.5	13.0					1	19,15	20,20	21,60	22,85	25,60
9	13.0				1,5	19,55	20,65	22,00	23,30	26,10	
9.5	14.0				1,5	19,95	21,10	22,40	26,75	26,60	
10	14.0				1,5	20,40	21,55	22,80	24,20	27,20	
10.5	15.0				1,5	20,90	22,10	23,40	24,85	28,00	
11	15.0				1,5	21,40	22,65	24,00	25,50	28,80	
11.5	16.0				1,5	21,90	23,20	24,60	26,15	29,60	
12	16.0				1,5	22,40	23,75	25,20	26,80	30,40	
12.5	17.0				1,5	22,90	24,30	25,80	27,45	31,20	
13	17.0				1,5	23,40	24,80	26,40	28,15	32,00	
13.5	18.0				1,5	23,95	25,40	27,10	28,90	32,90	
14	18.0				1,5	24,50	26,00	27,80	29,65	33,80	
14.5	19.0				1,5	25,05	25,60	28,50	30,40	34,70	

Zwischenabmessungen und andere längen und Sonderwerkstoffe z.B. ASP, CPM und Vanadis sind kurzfristig auf Wunsch lieferbar.

Für Mehr- und Minderpreise sehe Blatt 2.